

Product specification

Model No.	TH-47LFX60	TH-47LFX6N
DISPLAY		
Screen Size (Diagonal)	47-inch class (1192 mm)	
Aspect Ratio	16:9	
Effective Display Area (W x H)	1039 x 584 mm (40.9" x 23.0")	
Panel Type	IPS/Direct-LED	
Number of Pixels (H x V)	1920 x 1080 pixels	
Brightness (Typ)	2000 cd/m ²	1200 cd/m ²
Contrast Ratio	1300:1	
Dynamic Contrast	500000:1	
Viewing Angle (Horizontal /Vertical)	178°/178°	
CONNECTION TERMINAL		
HDMI In	HDMI Type A Connector x 1	
DVI-D In	DVI-D 24-pin x 1	
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	
PC In	Mini D-Sub 15-pin x1 (Female)	
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	
DIGITAL LINK	RJ45 x 1 (Shared with LAN)	
CONTROL		
Serial In	D-Sub 9-pin x 1, RS-232C Compatible	
LAN	RJ45 x 1, 100BASE-TX, Compatible with PjLink™ (Shared with DIGITAL LINK)	
AUDIO		
Audio Out	Pin Jack (L/R) x 1 set	
ELECTRICAL		
Power Requirements	110-127/220-240 V AC, 50/60 Hz	
Power Consumption	370 W	270 W
Power Off Condition	Approx. 0.3 W	
Stand-by Condition	Approx. 0.5 W	
Outdoor Mode On	Approx. 41 W	
Network Stand-by Mode	Approx. 16 W	
MECHANICAL		
Dimensions (W x H x D)	1162 x 706 x 216 mm (45.8" x 27.8" x 8.5")	
Weight	Approx. 47.0 kg (103.6 lbs.)	
Protection Glass	Yes	
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm (15.8" x 15.8")	
ENVIRONMENTAL		
Direct Sunlight Capability (Measures Against Blackout)	Yes (Built-in air cooling system)	
Dust and Water Resistant Level	IP55	
Operating Environment*1	Temperature: -20 °C*2 / 0 °C to 50 °C (-4 °F*2 / 32 °F to 122 °F) Humidity : 20 % to 80 % (Non Condensation)	

INCLUDED ACCESSORIES

AC power cord, Remote control transmitter, Batteries, Operating instruction book, Door holder, Panasonic badge, Ferrite core, Screw

*1 Don't use in places where the presence of corrosive gases or salt damage area. *2 When used in Outdoor mode.

Panasonic®



For the latest information about Panasonic Professional Display, please visit:

Professional Display Global Website: panasonic.net/cns/prodisplays/
YouTube: www.youtube.com/PanasonicProDisplay
Facebook: www.facebook.com/panasonicprojector

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. The PjLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Crestron Connected™ is a trademark of Crestron Electronics, Inc. HDBaseT™ is a trademark of the HDBaseT Alliance. All other trademarks are the property of their respective trademark owners. Images on screen are simulated. © 2017 Panasonic Corporation. All rights reserved.

Optional Accessories

Replacement Air Filter
TY-AF60STD

Peripheral Equipment


DIGITAL LINK Switcher
ET-YFB200G



Digital Interface Box
ET-YFB100G



Terminals

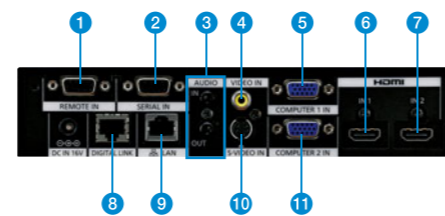

- 1 REMOTE Input
- 2 SERIAL Input
- 3 AUDIO Input/Output
- 4 VIDEO Input
- 5 COMPUTER Input 1
- 6 HDMI Input 1
- 7 HDMI Input 2
- 8 DIGITAL LINK Output
- 9 LAN
- 10 S-VIDEO Input
- 11 COMPUTER Input 2

Early Warning Software

ET-SWA100

Early Warning Software monitors the status of displays connected to an intranet and informs you when an abnormality is detected or predicted, and when there are symptoms of trouble. This minimizes displays downtime to support more stable operation.

Panasonic

BUSINESS

Tough LCD Display
47-inch class
TH-47LFX60
TH-47LFX6N

Crisp, Clear Information is Provided with High Brightness.
Ideal for Outdoor Places Subject to Rain,
Dust and Strong Sunlight



1. High Visibility

2. Durability

3. System Expandability



All information included here is valid as of April 2017.

CT17-G01PF-LFX
Printed in Japan.

TH-47LFX60

2000 cd/m²



Even when sunlight directly strikes the display, the high-brightness of 2000 cd/m²* makes images easy to see.


* LFX60 series



IP55 dust and water resistance makes it ideal for displaying information outdoors.

TH-47LFX6N

1200 cd/m²

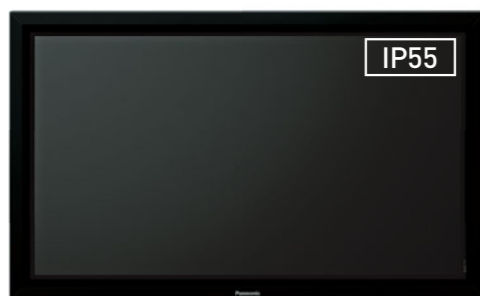

	TH-47LFX60	TH-47LFX6N
Brightness	2000 cd/m ²	1200 cd/m ²
IP	IP55	
Operating Environment	-20 °C* / 0 °C to 50 °C (-4 °F* / 32 °F to 122 °F)	
Rotation	Portrait/Landscape	
DIGITAL LINK	Yes	

* When used in Outdoor mode.

High Visibility

High-Brightness 2000 cd/m² Model* with Wide-Viewing-Angle IPS Panel and LED Backlight

The use of a bright LED backlight achieves a brightness of 2000 cd/m² for the LFX60 and 1200 cd/m² for the LFX6N. This provides a sharp image display even in brightly lit places, for excellent visibility capable of accurately relaying information. Choose the model that matches your usage environment.

* TH-47LFX60 only.

The IPS Panel Makes It Easy to Read from Many Positions



The IPS panel displays clear images, and colors appear unchanged even when the image is viewed from an angle top or bottom, right or left. It provides accurate information to many people in a large place such as a public facility.



Durability

Forced Air-Cooling System Helps to Prevent Blackouts and Dew Condensation

Outside air is brought into the cabinet to produce an airflow between the front glass and the LCD panel. This suppresses internal temperature rises and prevents blackouts when the display is installed outdoors. It also serves as a countermeasure against condensation.



Direct sunlight raises the LCD panel temperature and causes blackouts.



The LFX series operates stably even outdoors under direct sunlight.


Highly Durable Display Resists Temperature Changes

Featuring an operating temperature range of -20°C*¹ to 50°C (-4 °F*¹ to 122 °F), performance remains unchanged even in cold and hot climates.

*¹: When used in Outdoor mode.

Aluminum Cabinet and Tempered Glass

The aluminum cabinet strongly resists corrosion. In addition, tempered glass ensures rugged strength against impacts.

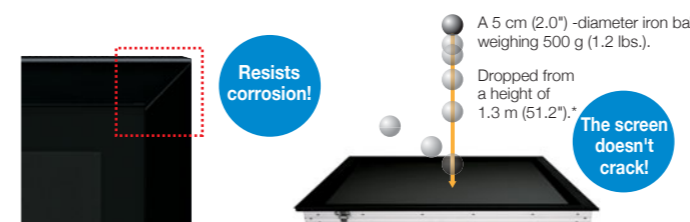

* Results from a Panasonic test environment. However, this does not imply a guarantee of those values.

Dust and Water Resistance Performance – Ideal for Outdoor Installation

IP level dust and water resistant performance provides tough durability in harsh conditions.

Dust Resistance		Water Resistance	
Level	Degree of Protection	Level	Degree of Protection
5	Protected against dust limited ingress (no harmful deposit)	5	Protected against water jet.

* What is IP?: This denotes the degree of dust and water resistance. IP is an abbreviation of the international standard Ingress Protection. Defined in the IEC60529 international standard.

High Reliability Enables Continuous 24-Hour Operation


The use of a highly durable panel and electronic components allows continuous 24-hour operation, ideal for installation in 24/7 stores, drive-thrus, public places, etc.

System Expandability

DIGITAL LINK for Transmission of Video, Audio and Control Signals for up to 100 m [328.1 ft] with a Single LAN Cable

Only a single LAN cable*¹ is required to transmit uncompressed HD video, audio and control signals for a distance of up to 100 m [328.1 ft]. The signal degradation risk is able to be smaller without limit. This enables indoor installation of the PC and other devices connected to the display at an outdoor location in order to protect the PC and devices from rain and dust. Since only one cable needs to be connected between the PC and panel, cable routing work is quick and easy. Because a control signal can also be sent simultaneously, it is easy to upgrade the system by combining it with the optional ET-YFB100G Digital Interface Box.

*¹: Use an STP cable of CAT5e or higher. *²: WUXGA (1,920 × 1,200 pixels) compatible.

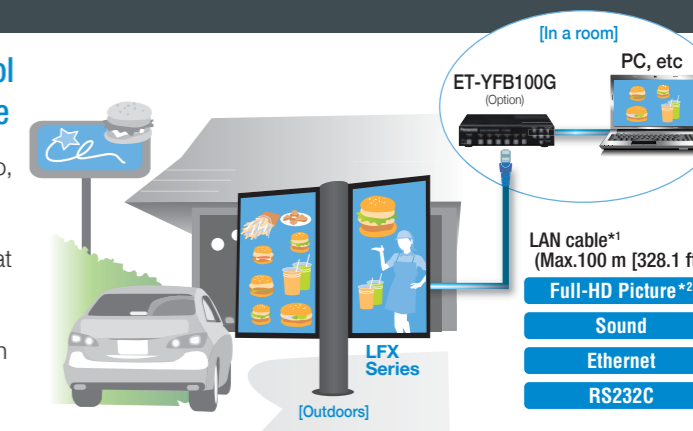

DIGITAL LINK is an original function added to HDBaseT™ technology. Used together with the ET-YFB100G Digital Interface Box, or other compatible equipment, the installation of this display is easier than ever without any need for external receivers.

See the following URL for information on other-brand peripheral equipment for which operation was confirmed.
<http://panasonic.net/prodisplays/support/digitallink.html>

* HDBaseT™ is a trademark of the HDBaseT Alliance.

* In case of running for a long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.
* Depending on the usage environment, the filter and inside surface of the protective glass may require regular cleaning.

